


Central Article Code: G34080M10-A  
 Local Code: EM1000

Created: 11/06/2010  
 Modified: 03/05/2018

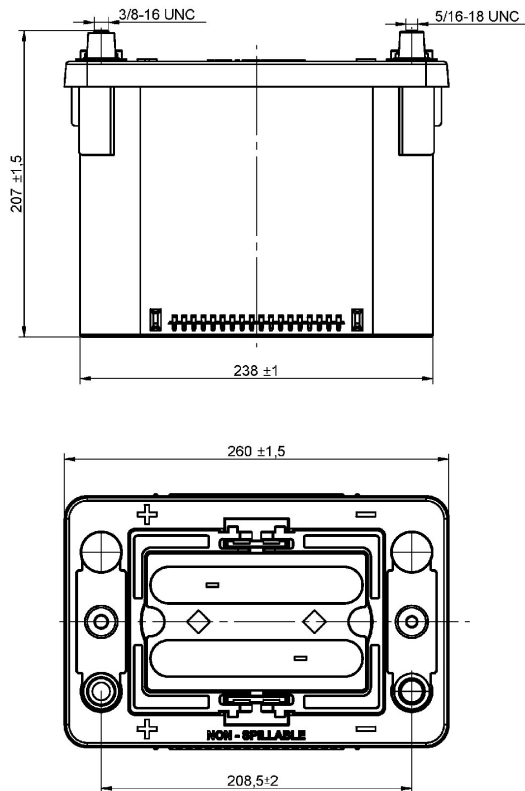

Final Outlook	G3410-A
Approval date	01/11/2010

## PERFORMANCES

Voltage (V):	12 V	
C20 (Ah):	50.0	20 h
Cranking (A):	800	EN
Charge:	CHARGED	
Technology:	Orbital	
Grid:	Pb-Sn	
Vibration:	V3+ (30Hz+/-2Hz/6g/60h)	
Endurance:	E3 (144 cycles@50%)	

## STD. DIMENSIONS

Length (mm ± 2):	260
Width (mm ± 2):	173
Height (mm ± 2):	206
Total Weight (kg ± 5%):	17.90

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

## CONTAINER

Type:	G34	BLACK
Hold Down:	B7	
H.D. Adapter:	No	

## COVER

Type:	Maxxima/Orbital	BLACK
Polarity:	ETN 1	
Terminals:	SAE M 3/8"- 5/16" taper&stud	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Central	
Filter:	2 Filters	
Lateral Plug:	No	

## PLUGS

Type:	6 x Valve+Cover	BLACK
-------	-----------------	-------

## HANDLES

Type:	2 x Integrated	BLACK
-------	----------------	-------

## OTHERS

Degassing Tube: No

3/8-5/16 nuts in plastic bag

DNV-GL type approved 2015