


CUSTOMER DATASHEET


Printed: 09/11/2023

Product Management
Transportation Europe

 Central Article Code:
 GC2095G06-A
 Created:
 12/09/2008

 Local Code:
 ES1100-6
 Modified:
 20/07/2023

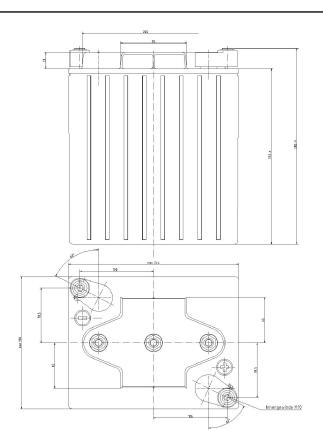



Final Outlook GC206-A Approval date 30/09/2008

	PERFORMANCES
Voltage (V):	6 V

C20 (Ah): 200.0 20 h Cranking (A): 0 EN

Charge: CHARGED

Technology: GEL Grid: Ca/Ca

Vibration: V3 (30Hz+/-2Hz/6g/20h)

Endurance: 400 cycles@100%

STD. DIMENSIONS

 Length (mm \pm 2):
 244

 Width (mm \pm 2):
 190

 Height (mm \pm 2):
 275

 Total Weight (kg \pm 5%):
 30.50

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type: GC2
Hold Down: B0
H.D. Adapter: No

COVER

BLACK

Type: DIN BLACK

Polarity: ETN 0

Terminals: M10 thread pos.and neg.

Terminal Adapter: No SOCI: No

Ventilation: Independent

Filter: No Lateral Plug: No

PLUGS

Type: 3 x M18 Valve GREY MEDIUM

HANDLES

Type: None

OTHERS

Degassing Tube: No

DNV-GL type approved 2015/Used for Bosch